




Matted WP Access Controller

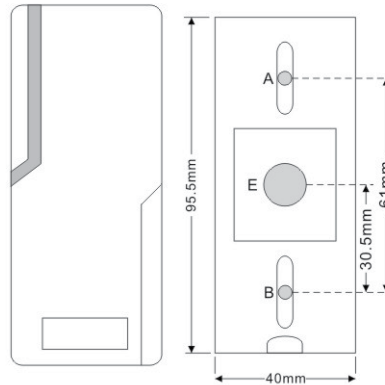

TECHNICAL CHARACTERISTICS

- **Power Supply:** 12 VDC
- **Card Type:** 125 KHz EM & HID
- **Static Current:** ≤ 15mA
- **Card Reading range:** 3-6 cm
- **Lock Output Load:** 20A
- **Alarm Output Load:** 20A
- **User Capacity:** 10.000
- **Anti-pass-back:** Yes.
- **Protection:** IP65 fully potted. With anti-demolition, alarm function, anti-static interference 15KV.
- **Operating Temperature:** -40°C~60°C (-40°F ~ 140°F)
- **Operating Humidity :** 0-95% (non-condensing)
- **Dimensions:** 103 mm x 48 mm x 23 mm (L x W x H)

CHARACTERISTICS

- Appearance design: plastic matte technic, compact, stylish, long lifespan.
- Very low power consumption.
- Anti-Magnetic: Preventing access by strong magnetic object.
- Manager Card: the manager card can add/delete users directly
- High Speed Search: filled with 10000 users, the search time < 0.1 5seconds.
- Can be used as slave reader, which supports Wiegand26 output
- Can connect with external slave reader: can connect with EM/IC/HID slave reader with Wiegand 26 output.
- Two PA240103 devices can be setup to interlock over the network.

ORDER INFORMATION

- **PA240103 :** Matted WP Access Controller EM & HID

RELATED PRODUCTS

- **PA240102 :** Matted WP Access Controller
-