




## Matted WP Access Controller HID & EM

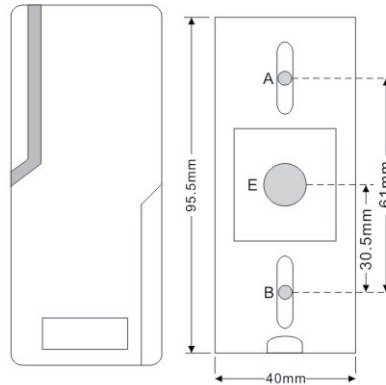

### TECHNICAL CHARACTERISTICS

- **Power Supply:** 12 VDC
- **Card Type:** 125 KHz HID & EM
- **Static Current:** ≤ 30mA
- **Response Time:** 0.1 second
- **Card Reading range:** 3-6 cm
- **Lock Output Load:** 20A
- **Alarm Output Load:** 20A
- **User Capacity:** 10.000
- **Anti-pass-back:** Yes.
- **Communication Interface:** Wiegand 26-37  
(Wiegand 26 cardreader. It will output Wiegand 26-37 according to HID card's format automatically.)
- **Protection:** IP65 fully potted.
- **Anti-Static:** 15KV
- **Transmit Distance:** 100m
- **Cable length:** 90-100cm.
- **Operating Temperature:** -40°C~60°C (-40°F ~ 140°F)
- **Operating Humidity :** 0-95%
- **Dimensions:** 103 mm x 48 mm x 23 mm (L x W x H)



## CHARACTERISTICS

- Appearance design: plastic matte technic, compact, stylish, long lifespan.
- Very low power consumption.
- For Wiegand 26, the reader will output according to the card's format automatically.
- Anti-Magnetic: Preventing access by strong magnetic object.
- Manager Card: the manager card can add/delete users directly
- Built-in optical tamper alarm technology

## ORDER INFORMATION

- **PA240202** : Matted WP Access Reader HID & EM

## RELATED PRODUCTS

- .....
- .....