




SmartKing™ TCP/IP access & attendance for 4 doors

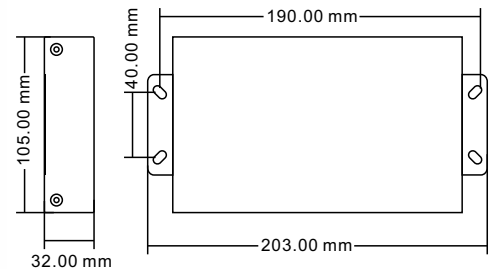

TECHNICAL CHARACTERISTICS

- **Power Supply:** 12VDC 3A
- **Idle Current:** ≤ 120 mA
- **Control Doors:** Can control up to 4 doors.
- **Quantity of connecting readers:** 4
- **User Capacity:** 20.000 users
- **Event Log:** 100.000 (can be saved on controller permanently)
- **Opening Methods:** card, card + pin, multi-cards, first card, etc..
- **Communication Standard:** TCP/IP.
- **Supported Databases :** Acces & SQL
- **Operating Temperature :** -40-60 °C
- **Operating Humidity :** 10~95% (non-condensing)
- **Delay time of opening doors:** 1 - 600 s optional
- **Input format of card data from reader:** Wiegand 26 & 34 bit.
- **Input format of pressing keypad of reader:** 4bit or 8bit.
- **Dimensions:** 201 mm x 125 mm x 32 mm (L x W x H)

CHARACTERISTICS

- **In/out management:** Can check in/out time of everyone, suit for in/out personnel management of all kind of sites.
- **Time & Attendance:** Suit for checking employees' attendance status & doing statistical management of corporation, government departments.
- **Access control setting:** Can set who/when/how can access.
- **Opening the door by cell phone through WIFI**
- **Anti-passback for 1 door**
- **Opening door by multi-card :** Swipe multiple cards, door will be opened.
- **Opening door by first card :** Must swipe the first card, the others can enter by swiping their card.

ORDER INFORMATION

- **PA240508 :** TCP/IP Access & Attendance for 4 Doors